
WINTER PARK · PHASE 2

Park Avenue Refresh

Not For Construction

STRINGFELLOW PLANNING & DESIGN

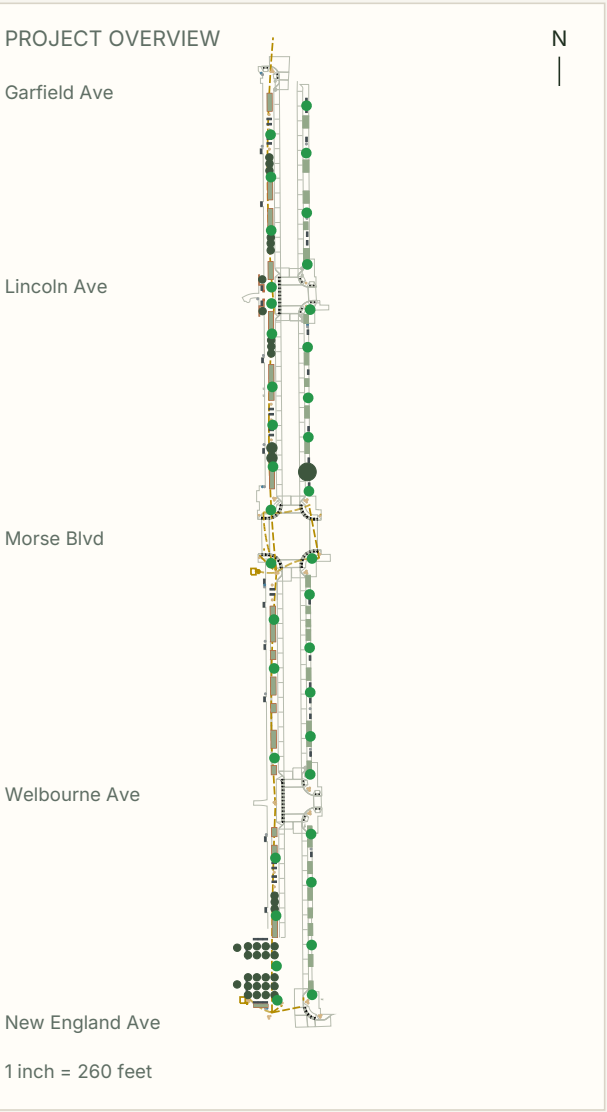

Project summary

Streetscape, planting, lighting, utilities and furnishings.

Furnishings & lighting

Light poles	**37**
Pots: V5 / V6 / V7	**13 / 29 / 13**
Trash / recycling cans	**19 / 5**
Benches: existing / proposed	**40 / 52**
Reuse / additional City supply	**37 / 15**
New bench purchases	**0 specified**
Decorative bollards	**87**
Handrails - pending	**Bryan / Danny**

Landscape & masonry

Proposed trees	**39**
Raised planters	**19**
Planting area	**1,599 sq ft**
Planters including walls	**2,423 sq ft**
Raised-planter walls	**919 ft**
North garden wall	**54 ft**
Garden wall columns	**2**

Civil

Demolition area	**41,729 sq ft**

Pole utilities

Outlet / lighting / irrigation boxes	**37 each**
Fiber vaults	**15**
New panel N	**1**

Conduit - Total project feet

Pole fiber: 2 inch	**4,485**
Pole fiber: 1¼ inch	**3,557**
Pole fiber total	**8,042**
Pole outlet power: 1–2 inch*	**2,250**
Street lighting: 2 / 1¼ inch*	**1,915**
Irrigation: 1¼ inch	**2,293**

Signal equipment - Current phase

Pull / splice boxes	**42 / 2**
Controller cabinets / pads	**1 / 2**

Signal proposal: see conduit plan

* Power size to confirm; lighting legend/detail conflict. Current / future signal quantities to confirm.

Preliminary quantities. Handrails: 16 CAD runs / 75 plan ft from a frozen layer; pending Bryan and Danny confirmation.

27 October 2026 · Conduit lengths exclude vertical connections and waste.